



**Features:**

- Universal AC input range(85~264Vac)
- Support 1+1 or N+1 redundant system ( suggest to use redundancy modules.)
- Built-in active PFC,PF>0.95
- High efficiency up to 92%
- Built-in current sharing function
- Built-in current limiting circuit
- Output protections: OVP/OLP/SCP/OTP
- Wide operating ambient temp (-25°C~70°C)
- 150%(180W) peak load capacity
- Easy Fuse Tripping due to High Overload Current
- Excellent Partial Load Efficiency
- Built-in DC OK relay contact
- Can be installed on TS-35/7.5 or TS-35/15
- 100% full load burn-in test
- Suitable for critical applications
- Ultra-slim,32mm width
- 3 years warranty




**SPECIFICATION**

MODEL	DG-120-12	DG-120-24	DG-120-48		
OUTPUT	DC Output	12V	24V	48V	
	Rated Current	10A ( pls refer to derating curve )			
	Current Range Note 1	0~10A	0~5A	0~2.5	
	Ripple and Noise Note 2	0~70°C	≤100mV	≤120mV	≤240mV
		-25°C	≤200mV	≤240mV	≤240mV
	Voltage ADJ. Range	12~14V	24~28V	48~56V	
	Voltage Accuracy	±1.0%			
	Line Regulation	±0.5%			
	Load Regulation	±1.0%			
	Set-up Time	<250mS@230Vac ; <500mS@100Vac			
	Hold up Time	≥20mS(230Vac input, Full load)			
Temperature Coefficient	±0.03%/°C				
Overshoot and Undershoot	<5.0%				
INPUT	Voltage Range	85Vac~264Vac			
	Frequency Range	47Hz~63Hz			
	Power Factor (typical)	0.99/100Vac 0.95/230Vac			
	Efficiency ( Typical)	89.5%	91%	92%	
	AC Current (max.)	<1.5 A/100Vac <0.65A/230Vac			
	Inrush Current (Typical)	<30A/100Vac <60A/230Vac Cold start			
	Leakage Current	Input—output:<0.25mA Input—PG:<3.5mA			
PROTECTION	Over Load	110%~150% of rated current, Constant current limiting for some time(150% of rated current, last 3S) then PS stop working for 7S,after 7S,if the load ≤=rated current, PS will work normally, auto recovery			
	Over voltage	15~18V	29~33V	58~65V	
		Protection type: Hiccup mode, Auto recovery			
	Over temperature	100±5°C, detect on heat sink of power transistor; shut down O/P, auto recovery after temperature goes down.			
Short Circuit	Long-term mode, auto recovery				
ENVIRONMENT	Operating amb. Temp. & Hum.	-25°C~70°C; 20%~90%RH No condensing			
	Storage Temp. & Hum.	-40°C~85°C; 5%~95%RH No condensing			
SAFETY & EMC Note 3	Safety Standards	meet UL508, UL60950, EN60950-1			
	Withstand Voltage	Primary-Secondary:3.0kVac; ≤10mA .Primary-PG:2.5kVac; ≤10mA. Secondary-PG:0.5kVac≤10mA.			
	Isolation Resistance	≥100M ohms			
	EMC Emission	Compliance to EN55022, EN55024, FCC PART 15 Class B			
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; heavy industry level			

<b>OTHERS</b>	MTBF (MIL-HDBK-217F)	More than 300.000Hrs (25°C, Full load)
	Dimension (W*H*D)	<b>32*124*119mm</b>
	Packing	28pcs/CTN, 18.02Kgs, 0.04cbm
	Cooling method	Cooling by free air convection
<b>Additional function</b>	Power boost	150% of rated current
	DC OK	V On: when output voltage is up to 90% of rated output voltage
		V Off: when output voltage is down to 80% of rated output voltage
	DC OK relay contact rating	Max 30V/1A or 60V/0.3A or 30Vac/0.3A Resistive load
Parallel function	support	
<b>NOTE</b>	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature. 2. Measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF & 10uF parallel capacitor. 3. The SPS is considered a component which will be installed into final equipment. We cannot guarantee that the final equipment will meet EMC directives, Final product manufactures must be re-confirm that their product meets EMC directives	


**Mechanical Specification**

Unit: mm

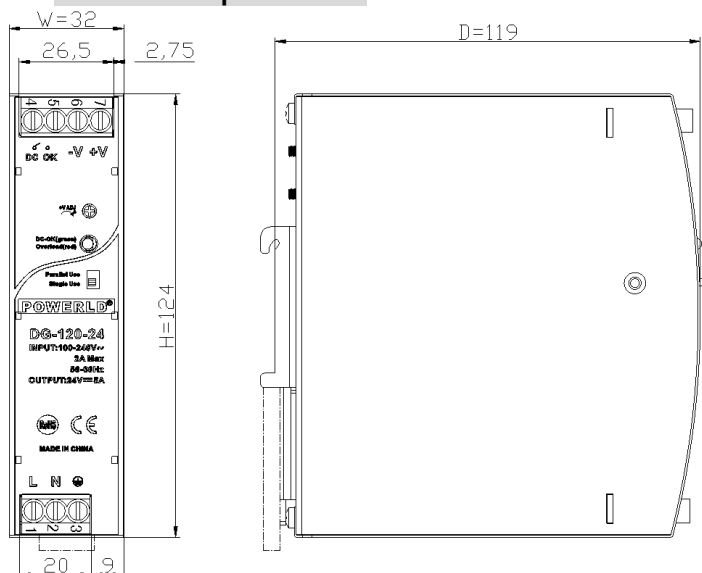


**Derating Curve**

For DG-120-12

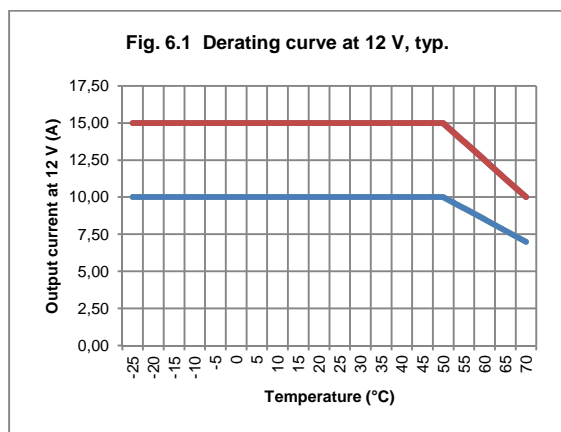

Red line for short time working;  
Blue line for continual working

For DG-120-24

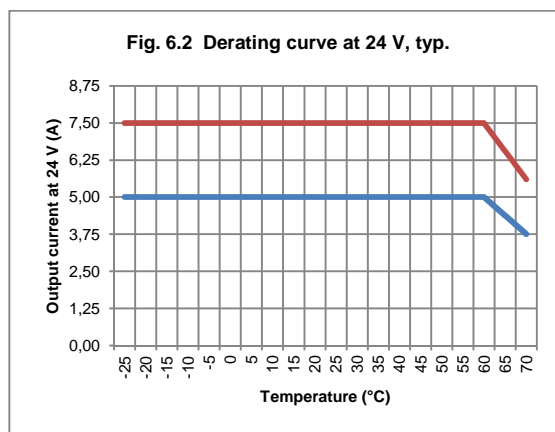

Red line for short time working;  
Blue line for continual working